


# PRODUCT INSTALLATION INSTRUCTIONS

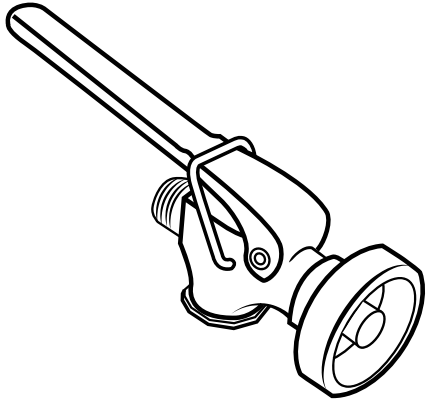

## Pre-Rinse Spray Valve

### To complete installation you will need:

- Pre-rinse spray valve (located in your kit)
- Crescent wrench (optional)

## Instructions

### REMOVE OLD PRE-RINSE SPRAY VALVE

1. Turn off the water to the faucet. Drain the hose. Place an old towel or rag over the drain in the sink. This will prevent the washer or grit from the faucet arm falling down the drain.
2. To remove the old pre-rinse spray valve from the hose, loosen by turning in a counterclockwise motion at the handle using your hand or a crescent wrench.

### CLEAN EXISTING HOSE

3. Using a rag, clean and dry the threaded area of the faucet thoroughly.

### INSPECT THE WASHER

4. Inspect the washer and replace if necessary.

### PREPARE FAUCET PRE-RINSE SPRAY VALVE

5. Remove the pre-rinse spray valve from the kit and confirm washer is in place within the hose nut.

### INSTALL NEW FAUCET PRE-RINSE SPRAY VALVE

6. Screw on the pre-rinse spray valve clockwise and hand tighten until snug. Do not over-tighten.
7. Turn on the faucet and check for leaks. If it leaks, gently tighten the valve handle. That should do it!

Note: As a safety feature, the pre-rinse spray valve will not completely stop the flow of water. This is to prevent buildup of hot water that might pose a threat to children.